



01-046
GENESIS 250/300
LOWER RAIL ASSEMBLY
INSTALLATION INSTRUCTIONS



*Fishing pole holder
not included

INCLUDED:
Rails with bracket
Hardware Pack

TOOLS NEEDED:
#2 Phillips
8mm socket or Wrench
5/16" Drill bit
Tape Measure
Marking Pen
Cordless Drill



Lower Rail

Madjax recommends professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

1

Using a #2 Phillips tip and 8mm socket or Wrench, remove the three 4mm x 50mm bolts from top rail.



2
With top rail removed from bracket, center bracket on lower grab bar cross member. Mark hole locations.

Note: Be sure rail bracket is pushed tightly to the vertical side of cross member to minimize rocking.



3
Using a 7/32" bit, drill through cross member of 3 marked locations.



4
Using the hardware retained from step 1, attach rail assembly to cross member and rail bracket as shown.

NOTE: There are two extra bolts, washers, and nuts included for additional stability. For use with loads above 30lbs this additional hardware needs to be added to rail assembly.

5
First locate the two suggested locations in the rail assembly diagram as shown. Using a 7/32" drill bit, drill in the rail channel and through the cross member for your new bolts.

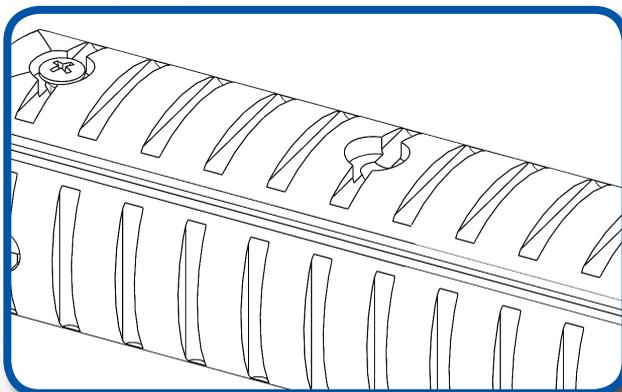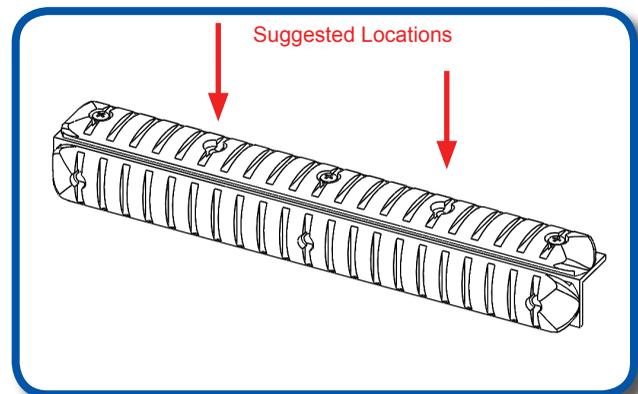

6
Using a 5/16" drillbit, create a countersink hole in the plastic rail for the bolt head. Once the drill bit reaches the channel, stop drilling. Insert new hardware and tighten.

INSTALLATION COMPLETE

VISIT WWW.MYMADJAX.COM FOR MORE INSTALLATION VIDEOS.

HARDWARE PACK

Pack 1

- 5 - 4mm x 50mm phillips #2
- 5 - 4mm flat washers
- 5 - 4mm lock nuts

WARRANTY PARTS

W01-109

- Hardware pack

W01-9-75

- L-Bracket

W01-9-76

- Rail

01-046 - LOWER RAIL SYSTEM

WARRANTY PARTS EXPLODED VIEW DIAGRAMS

