

Radio Console Installation Instructions for Club Car DS 1982-2000.5

Note: always wear appropriate eye protection!

Console Preparation:

Remove console top cover by removing five screws (figure a). Using speaker manufacturer supplied template, carefully cut speaker openings. Cut out radio opening above storage compartment (figure b). Install radio and speakers and complete all necessary wiring according to manufacturers instructions.

Install console brackets using six screws provided (figure c) being careful not to overtighten.

If necessary cut access holes in top cover for antenna and power wiring. Route wires through holes and replace console top cover.

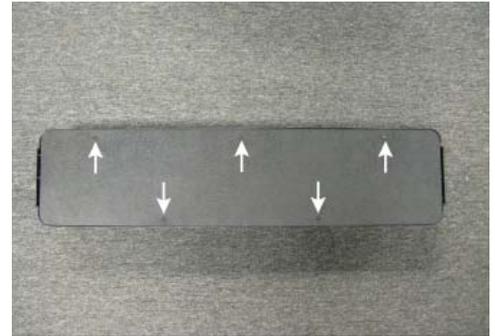
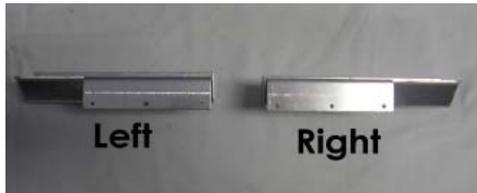


figure a



figure b



figure c

Console Installation:

Remove the four nuts and bolts that secure the roof to the front roof struts. The console assembly will mount between the roof and the inside edge of the roof struts (figure d). Reinstall and tighten nuts and bolts. Complete all wiring according to cart owners manual and/or manufacturers instructions.



figure d